



High Quality Custom Displays




Say it Big!



Brand Building



Indoor and Outdoor Banners

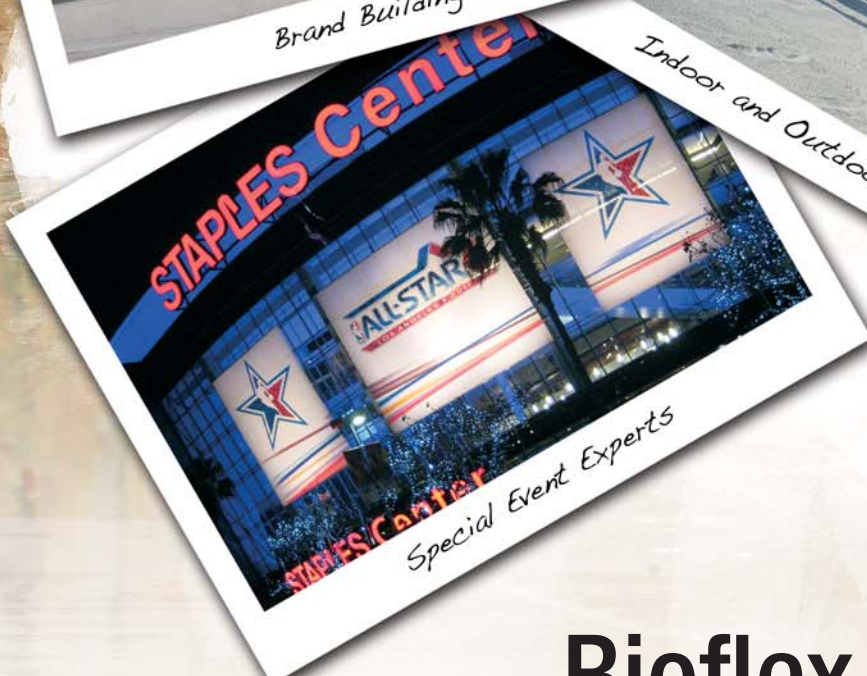

Special Event Experts

Bioflex California FR Fire Certificate



96-D Allen Boulevard
 Farmingdale, New York 11735-5626 USA
 Tel. +1 (631) 293-8944 Fax +1 (631) 293-8956
 e-mail: info@govmark.com

Received:06/21/2007 Completed:06/25/2007 Letter: T rb P.O.#: Test Report #: 2-68402-0-

Client's Identification Bioflex A Frontlit PVC Coated Vinyl For Digital Inkjet Printing,Used For Outdoor Signs Banners, Billboard Etc.

Tested For: **Jaime L. Giannantonio** Key Test: NFPA 701-96 TM#2 Flat MEA 210
 Ultraflex Systems Inc.
 1578 Sussex Tpk., Bldg. #4 Tel: 1-(973)-627-8608 Ext: 124
 Randolph, NJ 07869 Fax: 1-(973)-627-8506

Test Category: NFPA 701-96 TM2 Specifier: NYC Flex Signs CODE: 285-435-1685

TEST PERFORMED: NFPA 701 - Standard Methods of Fire Tests for Flame Resistant Textiles and Films 1996 Edition - Test Method #2 - Flat Sheet Specimens

As cited by The City of New York Department of Buildings Technical Policy and Procedure Notice #11/99 - Safety Standards for the Erection of Flex Sign Structures

SPECIMEN CONFIGURATION: Single Layer; Multi Layer

RESULTS REPORTED: Initially
 After 72 hours water leaching
 After 100 hours accelerated weathering

RESULTS: Specimen #	Afterflame (seconds)	Drip Burn (seconds)	Char Length (mm)
1	0	0	280
2	0	0	230
3	0	0	250
4	0	0	280
5	0	0	270
6	0	0	230
7	0	0	250
8	0	0	280
9	0	0	250
10	0	0	240

APPROXIMATE WEIGHT OF MATERIAL (as measured by Govmark): 554.8 g/m²

FAILURE CRITERIA: For each individual specimen --

Afterflame	Drip Burn	Char Length
Exceeds 2.0 seconds	Exceeds 2.0 seconds	Exceeds 435 mm (17.1")

RETEST PROVISION: Test 5 additional specimens if only 1 specimen fails.

CONCLUSION: Based on the above Results and Failure Criteria, the item tested:

Passes; Fails; Requires testing of 5 additional specimens



Govmark

Organization, Inc.

96-D Allen Boulevard
Farmingdale, New York 11735-5626 USA
Tel. +1 (631) 293-8944 Fax +1 (631) 293-8956
e-mail: info@govmark.com

Page 2

Order: 06/21/2007	Completed: 06/25/2007	Letter: T	rb	P.O.#:	Test Report #:	2-68402-0-
-------------------	-----------------------	-----------	----	--------	----------------	------------

Client's Identification	Bioflex A Frontlit PVC Coated Vinyl For Digital Inkjet Printing. Used For Outdoor Signs Banners, Billboard Etc.
-------------------------	---

Tested For: Jaime L. Giannantonio Ultraflex Systems Inc. 1578 Sussex Tpk., Bldg. #4 Randolph, NJ 07869	Key Test: NFPA 701-96 TM#2 Flat MEA 210 Tel: 1-(973)-627-8608 Ext: 124 Fax: 1-(973)-627-8506
--	--

PRECONDITIONING: 1 hr @ 220°F (Standard)
 24 hrs @ 68±9°F (Alternate: Material shrinks/distorts @ 220°F)

CONVERSION FACTORS: mm ÷ 25.4 = inches
 g/m² ÷ 28.35 x .835 = oz/yd²

REMARKS: None.

CERTIFICATION: I certify that the above results were obtained after testing specimens in accordance with the procedures and equipment specified by NFPA 701 - 1996 Edition Test Method #2 Flat Sheet Specimens.

Heather E. Robertson

AUTHORIZED SIGNATURE
THE GOVMARK ORGANIZATION, INC./pp

MS. HEATHER ROBERTSON

(Page 2 of 2)



96-D Allen Boulevard
 Farmingdale, New York 11735-5626 USA
 Tel. +1 (631) 293-8944 Fax +1 (631) 293-8956
 e-mail: info@govmark.com

Received:06/21/2007 Completed:07/03/2007 Letter: T1 rb P.O.#: Test Report #: 2-68402-1-

Client's Identification Bioflex A Frontlit PVC Coated Vinyl For Digital Inkjet Printing.Used For Outdoor Signs Banners, Billboard Etc.

Tested For: **Jaime L. Giannantonio** Key Test: NFPA 701-96 TM#2 Flat MEA WL 360
 Ultraflex Systems Inc.
 1578 Sussex Tpk., Bldg. #4 Tel: 1-(973)-627-8608 Ext: 124
 Randolph, NJ 07869 Fax: 1-(973)-627-8506

Test Category: NFPA 701-96 TM2 Specifier: NYC Flex Signs CODE: 285-435-1685

TEST PERFORMED: NFPA 701 - Standard Methods of Fire Tests for Flame Resistant Textiles and Films 1996 Edition - Test Method #2 - Flat Sheet Specimens

As cited by The City of New York Department of Buildings Technical Policy and Procedure Notice #11/99 - Safety Standards for the Erection of Flex Sign Structures

SPECIMEN CONFIGURATION: Single Layer; Multi Layer

RESULTS REPORTED: Initially
 After 72 hours water leaching
 After 100 hours accelerated weathering

RESULTS: Specimen #	Afterflame (seconds)	Drip Burn (seconds)	Char Length (mm)
1	0	0	280
2	0	0	270
3	0	0	260
4	0	0	250
5	0	0	290
6	0	0	260
7	0	0	260
8	0	0	260
9	0	0	260
10	0	0	250

APPROXIMATE WEIGHT OF MATERIAL (as measured by Govmark): 555 g/m²

FAILURE CRITERIA: For each individual specimen --

Afterflame	Drip Burn	Char Length
Exceeds 2.0 seconds	Exceeds 2.0 seconds	Exceeds 435 mm (17.1")

RETEST PROVISION: Test 5 additional specimens if only 1 specimen fails.

CONCLUSION: Based on the above Results and Failure Criteria, the item tested:

Passes; Fails; Requires testing of 5 additional specimens



The
Govmark
Organization, Inc.

96-D Allen Boulevard
Farmingdale, New York 11735-5626 USA
Tel. +1 (631) 293-8944 Fax +1 (631) 293-8956
e-mail: info@govmark.com

Page 2

Received:06/21/2007	Completed:07/03/2007	Letter: T1	rb	P.O.#:	Test Report #:	2-68402-1-
---------------------	----------------------	------------	----	--------	----------------	------------

Client's Identification	Bioflex A Frontlit PVC Coated Vinyl For Digital Inkjet Printing.Used For Outdoor Signs Banners, Billboard Etc.
-------------------------	--

Tested For: Jaime L. Giannantonio Ultraflex Systems Inc. 1578 Sussex Tpk., Bldg. #4 Randolph, NJ 07869	Key Test: NFPA 701-96 TM#2 Flat MEA WL 360 Tel: 1-(973)-627-8608 Ext: 124 Fax: 1-(973)-627-8506
--	---

PRECONDITIONING: 1 hr @ 220°F (Standard)
 24 hrs @ 68±9°F (Alternate: Material shrinks/distorts @ 220°F)

CONVERSION FACTORS: mm ÷ 25.4 = inches
g/m² ÷ 28.35 x .835 = oz/yd²

REMARKS: None.

CERTIFICATION: I certify that the above results were obtained after testing specimens in accordance with the procedures and equipment specified by NFPA 701 - 1996 Edition Test Method #2 Flat Sheet Specimens.

Heather E. Robertson

AUTHORIZED SIGNATURE
THE GOVMARK ORGANIZATION, INC./pp

MS. HEATHER ROBERTSON

(Page 2 of 2)



96-D Allen Boulevard
 Farmingdale, New York 11735-5626 USA
 Tel. +1 (631) 293-8944 Fax +1 (631) 293-8956
 e-mail: info@govmark.com

Received:06/21/2007 Completed:07/23/2007 Letter: T2 rb P.O.#: Test Report #: 2-68402-2-RP

Client's Identification Bioflex A Frontlit PVC Coated Vinyl For Digital Inkjet Printing.Used For Outdoor Signs Banners, Billboard Etc.

Tested For: **Jaime L. Giannantonio** Key Test: NFPA 701-96 TM#2 Flat MEA AW
 Ultraflex Systems Inc. NC
 1578 Sussex Tpk., Bldg. #4 Tel: 1-(973)-627-8608 Ext: 124
 Randolph, NJ 07869 Fax: 1-(973)-627-8506

Test Category: NFPA 701-96 TM2 Specifier: NYC Flex Signs CODE: 285-435-1685

TEST PERFORMED: NFPA 701 - Standard Methods of Fire Tests for Flame Resistant Textiles and Films 1996 Edition - Test Method #2 - Flat Sheet Specimens

As cited by The City of New York Department of Buildings Technical Policy and Procedure Notice #11/99 - Safety Standards for the Erection of Flex Sign Structures

SPECIMEN CONFIGURATION: Single Layer; Multi Layer

RESULTS REPORTED: Initially
 After 72 hours water leaching
 After 100 hours accelerated weathering

RESULTS: Specimen #	Afterflame (seconds)	Drip Burn (seconds)	Char Length (mm)
1	0	0.0	260
2	0	0.0	230
3	0	0.0	260
4	0	2.0	250
5	0	2.0	240
6	0	0.0	280
7	0	0.0	290
8	0	0.0	230
9	0	0.0	240
10	0	0.0	260

APPROXIMATE WEIGHT OF MATERIAL (as measured by Govmark): 566.5 g/m²

FAILURE CRITERIA: For each individual specimen --

Afterflame	Drip Burn	Char Length
Exceeds 2.0 seconds	Exceeds 2.0 seconds	Exceeds 435 mm (17.1")

RETEST PROVISION: Test 5 additional specimens if only 1 specimen fails.

CONCLUSION: Based on the above Results and Failure Criteria, the item tested:

Passes; Fails; Requires testing of 5 additional specimens



Govmark

Organization, Inc.

96-D Allen Boulevard
Farmingdale, New York 11735-5626 USA
Tel. +1 (631) 293-8944 Fax +1 (631) 293-8956
e-mail: info@govmark.com

Page 2

Order: 06/21/2007 Completed: 07/23/2007 Letter: T2 rb P.O.#: Test Report #: 2-68402-2-RP

Client's Identification: Bioflex A Frontlit PVC Coated Vinyl For Digital Inkjet Printing. Used For Outdoor Signs Banners, Billboard Etc.

Tested For: **Jaime L. Giannantonio**
Ultraflex Systems Inc.
1578 Sussex Tpk., Bldg. #4
Randolph, NJ 07869

Key Test: NFPA 701-96 TM#2 Flat MEA AW
NC
Tel: 1-(973)-627-8608 Ext: 124
Fax: 1-(973)-627-8506

PRECONDITIONING: 1 hr @ 220°F (Standard)
 24 hrs @ 68±9°F (Alternate: Material shrinks/distorts @ 220°F)

CONVERSION FACTORS: mm ÷ 25.4 = inches
g/m² ÷ 28.35 x .835 = oz/yd²

REMARKS: None.

CERTIFICATION: I certify that the above results were obtained after testing specimens in accordance with the procedures and equipment specified by NFPA 701 - 1996 Edition Test Method #2 Flat Sheet Specimens.

Heather E. Robertson

AUTHORIZED SIGNATURE
THE GOVMARK ORGANIZATION, INC./pp

MS. HEATHER ROBERTSON

(Page 2 of 2)