



*High Quality Custom Displays*




*Say it Big!*



*Brand Building*



*Indoor and Outdoor Banners*

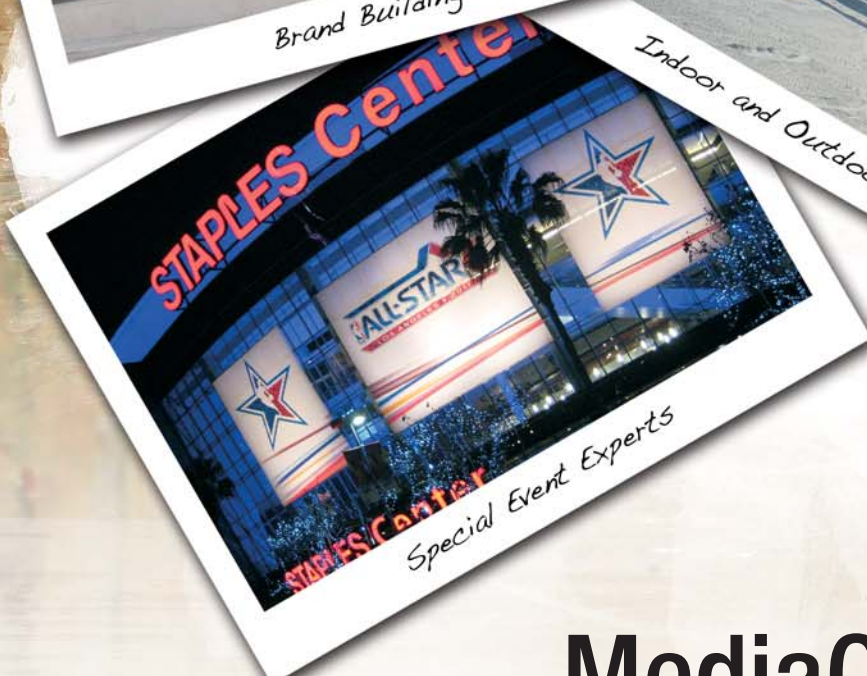

*Special Event Experts*


# MediaOne Polytex Fire Certificate



FROM : DIVERSIFIED TESTING LABS

FAX NO. : 3362271175

Apr. 03 2009 01:41PM P1



**DIVERSIFIED**  
**TESTING LABORATORIES, INC.**

“We Test Per Your Request”

336 WEST FRONT STREET  
P.O. BOX 4004  
BURLINGTON, NORTH CAROLINA 27215  
PHONE (336) 227-7710 • FAX (336) 227-1175  
www.diversifiedtestinglabs.com

April 3, 2009

Mr. Jason Bartusick  
MEDIA ONE  
DIGITAL IMAGING SOLUTIONS, LLC  
7211 Garden Grove Blvd.  
Suite D  
Garden Grove, CA 92841

Reference: Laboratory Test Report  
Lab Identification No. 9484  
Invoice No. 21858 (Attached)

Dear Mr. Bartusick:

One (1) fabric sample, identified as **ECO DISPLAY 210 FR+W**, was received and tested in accordance with the National Fire Prevention Association No. 701, "Standard Methods of Fire Tests for Flame Propagation of Textiles and Films, 2004 Edition, (Test 1, Small Scale)". The results are as follows:

<u>Specimen Number</u>	<u>Residual Flame (seconds)</u>	<u>Weight Loss (percent)</u>
1	0.0	17.15
2	0.0	24.12
3	0.0	21.46
4	0.0	17.50
5	0.0	17.92
6	0.0	15.70
7	0.0	21.97
8	0.0	25.43
9	0.0	21.22
10	0.0	6.96
AVG.	0.0	18.94

The fabric sample submitted **meets** the minimum requirements of the above standard. The average percent weight loss cannot exceed 40% and the weight loss of individual specimens cannot exceed mean value plus three standard deviations. The average residual flame cannot exceed 2.0 seconds.

If there are any questions or when we can be of further assistance, please let us know.

Sincerely,

Bobby E. Puett

BEP/mr  
Attachment