



*High Quality Custom Displays*




*Say it Big!*



*Brand Building*



*Indoor and Outdoor Banners*

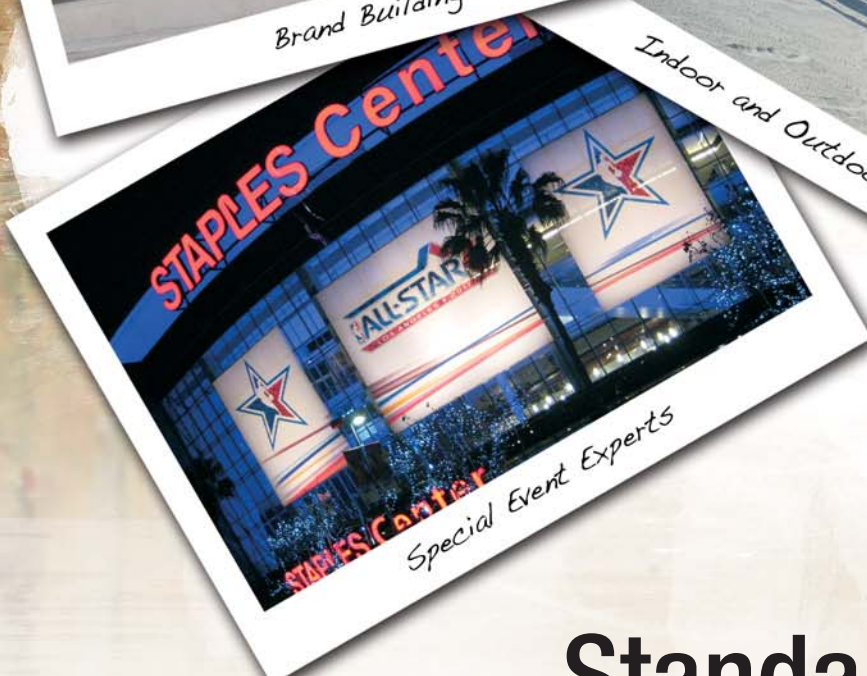

*Special Event Experts*

# Standard Vinyl Nusign 2 Fire Certificate



96-D Allen Boulevard  
 Farmingdale, New York 11735-5626 USA  
 Tel. +1 (631) 293-8944 Fax +1 (631) 293-8956  
 e-mail: info@govmark.com

Received: 03/07/2005	Completed: 03/07/2005	Letter: K	rb	P.O.#:	Test Report #:	2-55772-0-
Client's Identification	Style: B7945 Frontlit Standard. Content: Polyester. Width: 3.1m, 3.8m or 5.0m. Finish: Acrylic Top Coat. Weight: 450 g/m, 13.29 oz					
Tested For: Garland Drew Verseidag Seemee US 4 Aspen Drive Randolph, NJ 07869	Key Test: NFPA 701-2004 TM#1				150	
	Tel: 1-(973)-252-1189				Ext:	
	Fax: 1-(973)-252-1109					

FAILURE CRITERIA: As cited by NFPA 701 - 2004 Edition Test Method #1 (see Comments on page 3)

Afterflame	Flaming Drip Mean	Weight Loss (percent)	
		Mean	Individual Specimen
	Exceeds 2 seconds	Exceeds 40%	Exceeds Mean + 3 SD

CONCLUSION: Based on the Results on page 1 and the above Failure Criteria cited by NFPA 701 - 2004 Edition Test Method #1, the item tested:

Passes;  Fails;  Requires testing of 10 additional specimens  
 i.e. only one individual specimen failure was noted

REVISED FAILURE CRITERIA (see Comments on page 3):

Afterflame	Flaming Drip Mean	Weight Loss		Flame Height (Individual Specimen)
		Mean	Ind.-Spec.	
	Exceeds 2 seconds	Exceeds 40%	Exceeds 50%	Projects above top of specimen

CONCLUSION: Based on the Results on page 1 and the above Revised Failure Criteria, the item tested:

Passes;  Fails;  Requires testing of 10 additional specimens  
 i.e. only one individual specimen failure was noted

\* Afterflame is required to be recorded; however, the NFPA document does not factor it into the Failure Criteria reporting requirements. It should be noted that excessive afterflames (15 seconds or more) could be cause for rejection by local fire authorities performing "match" field tests.

CERTIFICATION: I certify that the above results were obtained after testing specimens in accordance with the procedures and equipment specified by NFPA 701 - 2004 Edition Test Method #1 with additional recording of flame height.

*Heather E. Robertson*

**MS. HEATHER ROBERTSON**

AUTHORIZED SIGNATURE  
 THE GOVMARK ORGANIZATION, INC. /pi

(Page 2 of 3)