



High Quality Custom Displays




Say it Big!



Brand Building



Indoor and Outdoor Banners

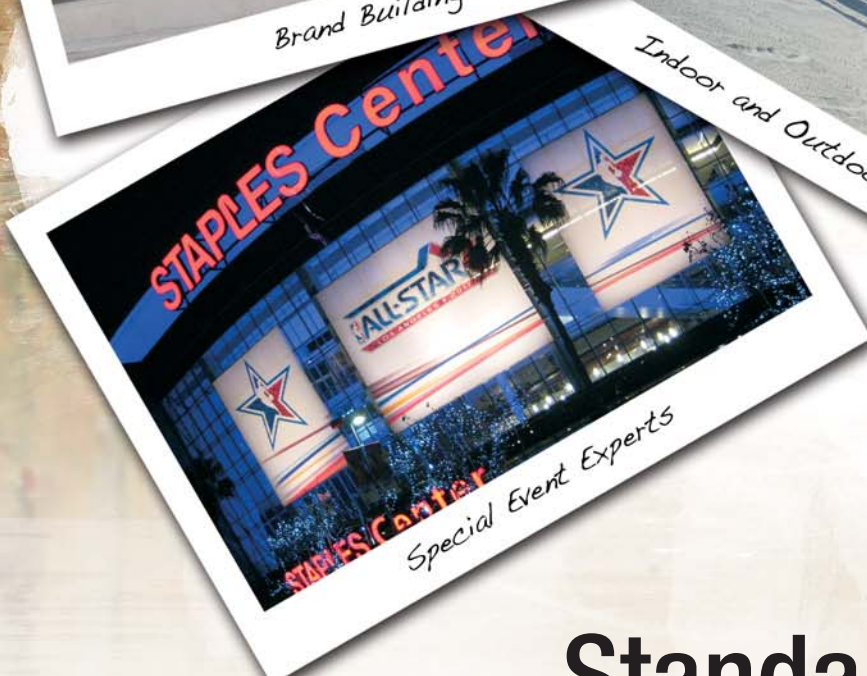

Special Event Experts

Standard Vinyl Fire Certificate



96-D Allen Boulevard
 Farmingdale, New York 11735-5626 USA
 Tel. +1 (631) 293-8944 Fax +1 (631) 293-8956
 e-mail: info@govmark.com

Received:03/07/2005	Completed:03/07/2005	Letter: K	rb	P.O.#:	Test Report #:	2-55772-0-
Client's Identification	Style: B7945 Frontlit Standard. Content: Polyester. Width: 3.1m, 3.8m or 5.0m. Finish: Acrylic Top Coat. Weight: 450 g/m, 13.29 oz					
Tested For: Garland Drew Verseidag Seemee US 4 Aspen Drive Randolph, NJ 07869				Key Test: NFPA 701-2004 TM#1		150
				Tel: 1-(973)-252-1189	Ext:	
				Fax: 1-(973)-252-1109		

COMMENTS:

The Govmark Org., Inc. has determined to establish failure criteria over and above the criteria spelled out in the NFPA document. The rationale for the "revised" criteria is as follows:

Weight Loss - Individual Specimen Failure:

 The NFPA 701 document, as written, provides for a statistical calculation which provides for retest and a potential failure if any individual value exceeds the mean by three standard deviations. Govmark is of the opinion that this cannot mathematically occur, i.e. no individual result is mathematically capable of exceeding the mean plus three standard deviations. Therefore, Govmark has established 50% as the absolute number for individual specimen criteria.

Individual Specimen - Flame Projects Above Top of Specimen:

 When NFPA introduced the weight loss criteria, this was hailed as a more objective measure of product performance over previous editions, which relied on visual measurements of fire degradation. Unforeseen were those products which are composed of finishes over substantially non burning substrates. Intense flaming of the finishes occurs without substantially reducing the total weight of the specimen that was tested. It is believed that similar behavior of the intensely burning surface finishes on products made from such material could result in the ignition of nearby combustibles.