



High Quality Custom Displays




Say it Big!



Brand Building



Indoor and Outdoor Banners

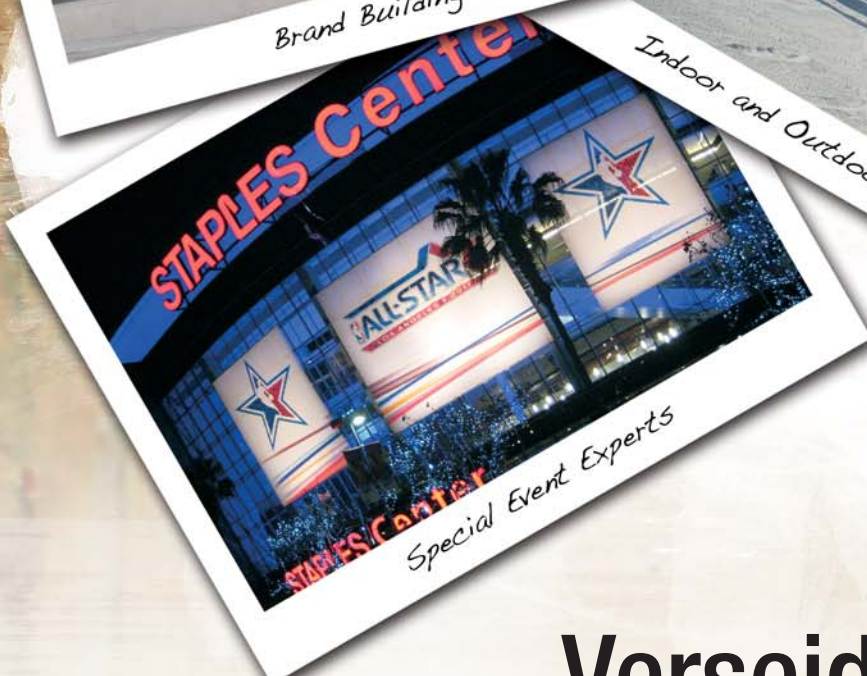

Special Event Experts

Verseidag Mesh NY Fire Certificate



96D Allen Blvd,
 Farmingdale NY 11735
 TEL: (631) 293-8944
 FAX: (631) 293 8956
 Page 1

Received:06/20/2001 Completed:06/27/2001 Letter: F rb P.O.#: Test Report #: 2-35526-0-

Client's Identification Seemee Mesh Supreme B3124-124.

Tested For: Garlarid Drew
 Verseidag Seemee US
 200 West Valley Brook Road
 Califon, NJ 07830

Key Test: NFPA 701-96 TM#2 Flat MEA NC

Tel: 1-(908)-832-1185 Ext:
 Fax: 1-(908)-832-5169

Test Category: NFPA 701-96 TM2 Specifier: NYC Flex Signs CODE: 295-375-1675

TEST PERFORMED: NFPA 701 - Standard Methods of Fire Tests for Flame Resistant Textiles and Films 1996 Edition - Test Method #2 - Flat Sheet Specimens as cited by The City of New York Department of Buildings Technical Policy and Procedure Notice #11/99 - Safety Standards for the Erection of Flex Sign Structures

SPECIMEN CONFIGURATION: Single Layer; Multi Layer

RESULTS REPORTED: Initially
 After 72 hours water leaching
 After 100 hours accelerated weathering

RESULTS: specimen #	Afterflame (seconds)	Drip Burn (seconds)	Char Length (mm)
1	0	0	265
2	0	0	260
3	0	0	240
4	0	0	240
5	0	0	240
6	0	0	250
7	0	0	230
8	0	0	260
9	0	0	250
10	0	0	280

APPROXIMATE WEIGHT OF MATERIAL (as measured by Govmark): 309 g/m²

FAILURE CRITERIA: For each individual specimen --

Afterflame	Drip Burn	Char Length
Exceeds 2.0 seconds	Exceeds 2.0 seconds	Exceeds 435 mm (17.1")

RETEST PROVISION: Test 5 additional specimens if only 1 specimen fails.

CONCLUSION: Based on the above Results and Failure Criteria, the item tested:

Passes; fails; Requires testing of 5 additional specimens

(continued on page 2)

File Copy

